

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representation of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY


As rescanning documents *will not* correct images, please do not report the images to the Image Problem Mailbox.



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : G06F 13/10	A1	(11) International Publication Number: WO 00/28426 (43) International Publication Date: 18 May 2000 (18.05.00)
(21) International Application Number: PCT/US99/26626 (22) International Filing Date: 11 November 1999 (11.11.99) (30) Priority Data: 09/189,572 11 November 1998 (11.11.98) US (71) Applicant (for all designated States except US): XIRCOM, INC. [US/US]; 2300 Corporate Center Drive, Thousand Oaks, CA 91320-1420 (US). (72) Inventors; and (75) Inventors/Applicants (for US only): KAVANAUGH, Paul, K. [US/US]; 35 Kensington Drive, Eastampton, NJ 08060 (US). TODOROVICH, Mark, M. [US/US]; 42 Algonquin Trail, Medford Lakes, NJ 08055 (US). GRIEB, Robert, L. [US/US]; 322 Tavistock Drive, Medford, NJ 08055 (US). (74) Agent: KIMBELL, Daniel, R.; Christie, Parker & Hale, LLP, Post Office Box 7068, Pasadena, CA 91109-7068 (US).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>With amended claims.</i>

(54) Title: WALLET FOR PERSONAL INFORMATION DEVICE

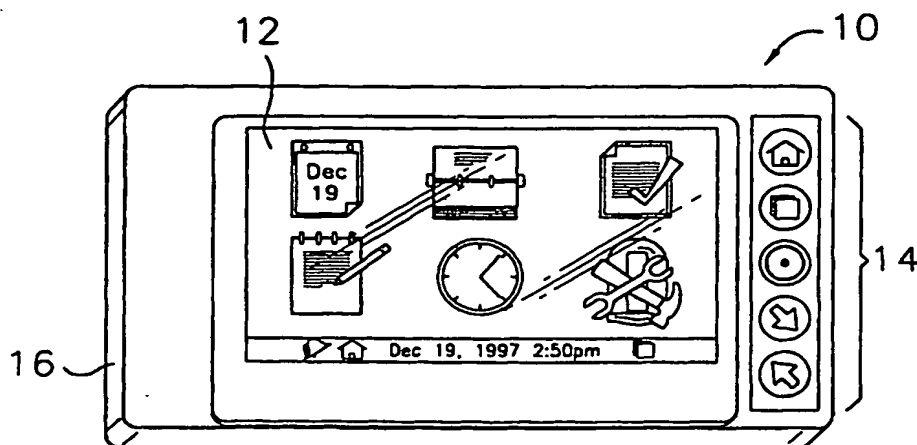

(57) Abstract

A wallet (70) for a personal information device (10) in a form of a PCMCIA card such as a PCMCIA-card electronic organizer. The wallet (70) includes an input device (80) separated from the input device (14) of the personal information device (10) and two halves (72, 74) that may be folded together in a wallet-like fashion. One (72) of the halves generally includes a touch panel input (80) to allow a user to enter information, commands instructions, etc., thereto. A personal information device (10) is mounted to the second half (74) of the wallet (70). When mounted, the wallet (70) supplies via an electrical connection (16) or induction communication (84) the user-supplied information entered into the touch panel input (80) to the personal information device (10). The wallet display (80) may be powered by personal information device (10) via the electrical connection or self-powered. Upon coupling the personal information device (10) to the wallet (70), personal information device (10) may supply a wake signal to wake up or automatically turn on the input device (80) of the wallet (70). The wallet (70) may further include an input/output connector (82) for coupling via a cable (90) the wallet (70) to an external device such as another wallet, a personal computer, etc.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

WALLET FOR PERSONAL INFORMATION DEVICE

BACKGROUND OF THE INVENTION

The present invention relates to a wallet for a personal information device, e.g., an electronic organizer, and, more particularly, to a wallet having a touchpad and, optionally, a PCMCIA connector therein for use in combination with a personal information device.

Recently, there has been a trend to develop and utilize compact and pocket-size electronic devices, such as compact computers (notebook computers), compact electronic personal organizers, compact electronic dictionaries, compact electronic encyclopedias, and so on. As such devices become smaller in size, various problems result, including a reduction in the ease of their operation due to, for example, reduced-sized keys, reduced-sized displays and/or reduced number of keys thereon.

Recent developments have attempted to overcome this problem as well as other problems that are inherent in compact and pocket-sized electronic devices. For example, many compact electronic personal organizers are now equipped to communicate with a personal computer, wherein a user enters various data, e.g., telephone numbers, appointments, etc., into the computer which then transmits or downloads that entered data to the compact electronic personal organizer for storage therein. This technique provides two advantages over previous devices. Data is more easily entered with a full sized keyboard than with a reduced-size keypad. Data is entered only once to utilize organizer programs running on both the personal computer and the compact electronic personal organizer.

While the above-mentioned and other developments have produced more user friendly, easier to use and more sophisticated compact organizers, there still is a need for a personal information device, e.g., an electronic personal organizer, that is yet smaller in size than existing devices and easier to use, and which is designed to allow for easier development of software-driven features therein.

There also is a need to provide accessories for use with these personal information devices that make such devices even easier to use.

Therefore, it is an object of the present invention to provide a wallet for use with a micro-sized personal information device which makes the micro-sized personal information device easier to use than without the wallet.

Various other objects, advantages and features of the present invention will become readily apparent to those of ordinary skill in the art, and the novel features will be particularly pointed out in the appended claims.

1 SUMMARY OF THE INVENTION.

5 In accordance with an embodiment of the present invention, a wallet is provided for use with a personal information device comprising a first portion (i.e., a first half) that includes an input device (e.g., a touch-panel, a touch pad in the form of a keyboard) for receiving a user-supplied entry, and a second portion (i.e., a second half) that is rotatably coupled to the first portion. The second portion is adapted to receive and detachably retain a personal information device in the form of a PCMCIA card, and the second portion is operable to supply via an electrical connection to the personal information device the user-supplied entry that is received by the input device.

10 As an aspect of the present invention, the wallet is operable to receive from the personal information device control data, and the input device is a touch-sensitive display device that is operable to display information to the user in accordance with the control data.

15 As another aspect of the present invention, the wallet includes a memory having pre-stored therein a plurality of sets of display data, and each set of display data represents a respective display that is displayable on the touch-sensitive display device.

As a further aspect of the present invention, the wallet includes a PCMCIA port adapted to receive the PCMCIA I/O port of the personal information device.

20 As an additional aspect of the present invention, the wallet includes an I/O connector that can be coupled via a cable to an external device such as a computer or another wallet having mounted therein another personal information device.

25 In accordance with another embodiment of the present invention, the combination of a wallet and a personal information device includes a wallet first half that includes an input device for receiving a user-supplied entry, a wallet second half that is rotatably coupled to the first half, and a personal information device in the form of a PCMCIA card mounted in the wallet, wherein the personal information device includes a display for displaying information to the user, an input device for receiving a user-supplied input, and input means for receiving data from the wallet when the personal information device is mounted therein. The wallet second half also includes an output for providing the user-supplied entry to the personal information device.

30 In accordance with a further embodiment of the present invention, the combination of a personal information device and a wallet includes a personal information device having a display, an input device and an induction coil, and a wallet having an input device and an induction coil. The wallet is adapted to receive and detachably retain the personal information device. The induction coil of the personal information device and the induction coil of the wallet are adapted to communicate with each other without electrical contact therebetween when the personal information device is retained by the wallet.

35 As an aspect of this embodiment, the personal information device controls its induction coil to supply a wake signal to the wallet, and the input device of the wallet is adapted to be automatically turned on when the wallet's induction coil receives the wake signal.

1 As another aspect of this embodiment, the input device of the wallet is adapted to turn off if the wallet induction coil does not receive a wake or stay-awake signal within a predetermined period of time after receiving a previously supplied wake or stay-awake signal.

5 In accordance with an additional embodiment of the present invention, a method of communication between a personal information device and a wallet is carried out by mechanically coupling the personal information device to the wallet, supplying from the personal information device to the wallet a wake signal after the personal information device and the wallet are coupled, receiving by the wallet the wake signal supplied by the personal information device, and turning on the input device of the wallet automatically in response to the wallet receiving the wake signal.

10 As an aspect of this embodiment, the wake signal is supplied by the induction coil of the personal information device and the induction coil of the wallet receives the wake signal.

15 BRIEF DESCRIPTION OF THE DRAWINGS

 The following detailed description, given by way of example and not intended to limit the present invention solely thereto, will best be appreciated in conjunction with the accompanying drawings, wherein like reference numerals denote like elements and parts, in which:

20 FIG. 1 is a schematic illustration of personal information device 10 of the present invention;

 Figs. 2A-2F are exemplary displays of the various organizer features of personal information device 10;

 Fig. 3 is a block diagram of personal information device 10 of the present invention;

25 Fig. 4 is a data structure of dual-ported memory 22 in accordance with the present invention;

 Fig. 5 is a data structure of dual-ported memory 22 in accordance with another embodiment of the present invention;

 Fig. 6 is a schematic illustration of docking station 50 having personal information device 10 coupled thereto in accordance with the present invention;

30 Fig. 7 is a block diagram of docking station 50 of the present invention;

 Fig. 8 is a schematic illustration of the coupling of personal information device 10 via docking station 50 to a host computer;

 Fig. 9 is an exemplary schematic illustration of wallet 70 of the present invention having personal information device 10 inserted therein;

35 Fig. 10 is another illustration of wallet 70 of the present invention;

 Fig. 11 is a further illustration of wallet 70 having personal information device 10 inserted therein;

 Figs. 12A and 12B are schematic diagrams of exemplary induction circuits of wallet 70

1 and personal information device 10;

Fig. 13 schematically illustrates the operation of the touch-pad of wallet 70 of the present invention.

5 DETAILED DESCRIPTION OF CERTAIN PREFERRED EMBODIMENTS

This continuation-in-part application is directed to a wallet for use with a personal information device. A detailed discussion of the personal information device, which is the claimed subject matter of a parent application, is first provided, followed by a detailed discussion of the wallet of the present invention.

10 Personal Information Device

The personal information device of the present invention is a micro-sized device that has the form of a PCMCIA card and that includes therein an LCD display screen and navigation buttons. As will be discussed, the personal information device (PID) provides various organizer or other types of features to a user and may be inserted within a PCMCIA port (also identified as a PC-card slot) of a personal computer for downloading of various information from the computer to the personal information device. Also, and as will be discussed, the personal information device may communicate with a personal computer via a docking station. The personal information device of the present invention, as described herein, is an electronic personal organizer having various organizer features and functions and, thus, is also identified herein as an organizer. However, the personal information device of the present invention may embody functions and features that are not considered to be so-called organizer functions and, thus, the present invention is not to be limited to electronic organizers.

Referring now to the drawings, Fig. 1 is an exemplary illustration of the personal information device 10 of the present invention. As shown, personal information device 10 has a PCMCIA (Personal Computer Memory Card International Association) compatible form factor and includes a flat panel display 12, for example, an LCD display screen, various buttons 14 and a PCMCIA port 16. Display 12 and buttons 14 are within the form factor of the PCMCIA card and, thus, personal information device 10 having such display and buttons may be inserted into the PCMCIA port of a personal computer. During "standard" operation of the personal information device, that is, when the device is not coupled to a computer, various organizer features are provided to a user. For example, and as shown on display 12 of the exemplary illustration of Fig. 1, the various organizer features may be provided in the form of a menu having selectable entries therein. In the exemplary embodiment, the various organizer features of personal information device 10 include a schedule/appointment calender, a telephone directory, a "to do" list, a memo holder, various time clocks and user customization, with each organizer function having a respective icon on the displayed menu. Using the appropriate input buttons 14, the user selects any one of the displayed icons to implement the corresponding

1 organizer feature, and upon selection of an organizer feature, a sub-menu or other display is provided.

5 Figs. 2a-2f are exemplary displays of the six exemplary organizer features that may be selected. Fig. 2a is displayed upon selection of the calendar icon in the main menu of Fig. 1, Fig. 2b is displayed upon selection of the card file (or Rolodex®) icon, Fig. 2c is displayed upon selection of the "to do" list icon, Fig. 2d is displayed upon selection of the memo icon, and Fig. 2e is displayed upon selection of the clock icon. Fig. 2f represents a user customization menu and is displayed upon selection of the toolkit icon.

10 Generally, the user depresses the appropriate buttons 14, which includes, for example, a main menu button, up and down cursor movement buttons, a select entry button, etc., to manipulate through the various menus and displays of personal information device 10. It is appreciated that the illustrated displays and buttons are provided for purposes of a background understanding of the organizer features of the present invention and are not intended to limit the present invention solely thereto. Since the basic operation of the personal information device
15 having various menus and displays for providing various organizer functions to a user is well known to those of ordinary skill in the art, further description thereof is not provided herein except where necessary for an understanding of the present invention.

20 The "Reprogramming" Feature

20 In accordance with the present invention, personal information device 10 includes the capability of receiving "reprogramming" data from a personal computer coupled thereto and reprogramming itself utilizing the downloaded data so as to provide new applications to the user and/or to update the software currently stored in the personal information device. The downloaded applications may include organizer and/or other applications and features for the
25 end-user, as well as diagnostic code that is generally utilized during the production of the application and reprogramming code itself. As will be discussed, the downloading of data and reprogramming of the personal information device of the present invention is herein identified collectively as the "reprogramming" feature of the personal information device.

30 Referring to the block diagram of personal information device 10 shown in Fig. 3, personal information device 10 includes a processor (CPU) 20, a dual-ported memory 22, a work memory 24, a flash memory 26 and PCMCIA port 16. Although not shown in Fig. 3, personal information device 10 further includes display 12, buttons 14, previously discussed, and a battery for supplying power to the various components. Dual-ported memory 22 is accessible to processor 20 and also to a computer via a bus 30 and PCMCIA port 16 when coupled to personal
35 information device 10. Processor 20 is coupled to work memory 24, flash memory 26 and dual-ported memory 22 via a bus 28. As shown in Fig. 3, work memory 24 and flash memory 26 are not externally accessible. Also, various control signals are provided between processor 20 and the attached computer via lines 32 and PCMCIA port 16.

1 Personal information device 10 is operable to communicate with a host computer in one
of two ways. When the host computer includes a PCMCIA port or slot, and since personal
information device 10 is a PCMCIA card, the personal information device may simply be
5 inserted into the computer's PCMCIA port. Insertion of personal information device 10 into the
computer's PCMCIA port is identified herein as the direct connection method. If, however, the
host computer does not include a PCMCIA port, the docking station of the present invention is
utilized to couple personal information device 10 to the computer. As will be discussed, the
docking station includes a PCMCIA slot into which personal information device 10 is inserted
and a serial connector for connection to the serial port of the computer.

10 The reprogramming feature of the present invention is carried out in three stages, a
downloading stage, an installation stage and a reprogramming stage, and is discussed below with
the assumption that the host computer includes a PCMCIA slot into which personal information
device 10 is inserted. The first or downloading stage involves the downloading of code from a
15 computer to the personal information device. When personal information device 10 is inserted
into the PCMCIA port of a host computer and when appropriate application code in the computer
is executed, application and reprogramming code is downloaded to dual-ported memory 22 under
the control of the host computer. The application code, the reprogramming code and a special
data string, which is used to facilitate the installation stage, are stored in dual-ported memory 22.
20 The application code, reprogramming code and special data string are collectively identified as
the reprogramming data. The second or installation stage involves the transferring to work
memory 24 of the reprogramming code contained in the reprogramming data stored in dual-
ported memory 22. The programming code is transferred so that processor 20 can safely execute
it. The final or reprogramming stage involves the execution of the programming code stored in
work memory 20 which, in turn, programs flash memory 26, as discussed below. Upon
25 completion of the reprogramming stage, the reprogramming code passes execution to the newly
installed application code in the flash memory.

The Downloading Stage

30 During the downloading stage, the reprogramming data is downloaded from the attached
host computer and stored in dual-ported memory 22. In the direct connection method, that is,
when personal information device 10 is inserted into the PCMCIA port of the host computer, the
host computer addresses dual-ported memory 22 as it would during normal communications with
personal information device 10 and stores the reprogramming data in dual-ported memory 22.

35 When a docking station is used, serial communication device driver software within
processor 20 utilizes several pins of PCMCIA connector 16 as serial communications lines, and
using an established protocol, the driver stores the reprogramming data (serially transmitted,
discussed below) in dual-ported memory 22.

In accordance with the present invention, the reprogramming data is stored at the address

1 locations in dual-ported memory 22 in the manner shown in Fig. 4. As shown, a "Code Update"
string of the reprogramming data is stored at a pre-defined address location, the reprogramming
code is stored at another pre-defined address location following (or not pre-defined location but
immediately following) the code update string, and the new application code (also called flash
5 application code) to be installed into flash memory 26 is stored at a further pre-defined address
location following (or not pre-defined location but immediately following) the reprogramming
code. As previously mentioned, the code update string (special data string) identifies that the
data stored in dual-ported memory 22 is for reprogramming of flash memory 26 and is utilized
during the installation stage.

10 While a particular data structure of dual-ported memory 22 is shown in Fig. 4, other
structures are possible. For example, Fig. 5 discloses a structure wherein a reprogramming
header stored at a pre-defined address location identifies the address locations at which the
reprogramming data and the new application code are stored. In this structure, greater flexibility
is achieved by utilizing (e.g., during downloading) only that memory of dual-ported memory 22
15 that is necessary. For example, user data that is stored in dual-ported memory 22 (prior to the
initiation of the reprogramming feature) may be retained (i.e., not overwritten during the
downloading stage) for future use by the application software.

Still yet other data structures are possible. For example, the reprogramming and
application code may be stored in blocks throughout the memory instead of in contiguous
20 memory. In this instance, dual-ported memory 22 is divided into blocks of pre-defined size with
each block beginning with a respective block header. Also, the fragmented code in dual-ported
memory 22 can be referenced by an expanded reprogramming header or by a scan of each block
header for a special string.

25 The Installation Stage

When the reprogramming data is stored in dual-ported memory 22, the installation stage
begins wherein the reprogramming code is transferred by processor 20 to work memory 24. As
previously mentioned, work memory 24 is not accessible via PCMCIA connector 16. Thus, work
memory 24 is protected from subsequent downloading of data (write operations) by the host
30 computer thereby providing the desired result that the reprogramming code stored in work
memory 24 cannot be overwritten by the host computer during its execution.

In accordance with the preferred embodiment of the present invention, the installation
stage does not begin until personal information device 10 card is removed from the computer's
PCMCIA slot. The disconnection of personal information device from the host computer causes
35 an interrupt to processor 20 (via lines 32) which, in turn, initiates a routine within processor 20
that controls processor 20 to determine if reprogramming data has been newly downloaded into
dual-ported memory 22. If the "Code Update" string is stored at the predefined address within
dual-ported memory 22, processor 20 transfers (installs) the reprogramming data stored in dual-

1 ported memory 22 to work memory 24, at which time, the installation stage is complete.

5 In an alternative embodiment of the present invention, processor 20 periodically polls dual-ported memory 22 to determine if reprogramming data is newly downloaded, for example, by polling for the "Code Update" string. Upon determination that new reprogramming data has been downloaded, processor 20 transfers the new reprogramming data to work memory 24. In this embodiment, installation of reprogramming data into work memory 24 and the subsequent programming of the flash memory (in the next stage) can occur while personal information device 10 is still coupled to the host computer.

10 The Reprogramming Stage

Upon installation of the reprogramming data into work memory 24, processor 20 passes execution to the reprogramming code stored in work memory 24 to begin the reprogramming stage. The reprogramming code, also called the reprogramming application, carries out a multi-step process of first diagnosing the new application code stored in dual-ported memory 22, then erasing flash memory 26, and finally programming flash memory 26 with the new application code stored in dual-ported memory 22.

15 Initially, the reprogramming application ascertains the integrity of the newly downloaded application code. This may be achieved in any number of ways including, for example, performing a checksum of the application code. Other diagnostic techniques are well known in the art and therefore are not discussed herein. If the reprogramming application ascertains errors in the application code, it may attempt to correct those errors if the application code also includes appropriate error correction code. If the application code is faulted and not correctable, then the reprogramming feature of personal information device 10 terminates thus preserving the older application code stored in flash memory 26. In an alternative embodiment, the diagnostic step is skipped.

20 In addition to diagnosing the newly downloaded application code, the status of the power source (i.e., battery) is verified to determine if the power source can provide enough power for the personal information device to erase flash memory 26 and subsequently reprogram flash memory 26 (discussed below). If the power source measures below a predetermined threshold, then it is likely that the reprogramming feature cannot be performed to completion and, thus, the reprogramming feature is terminated at this point (i.e., before the flash memory is erased) thereby preserving the older application code stored in flash memory 26.

25 The reprogramming application carries out an erasing operation of flash memory 26. However, since the programming algorithm and program/erase block size that are utilized to erase a flash memory is dependent on the type of flash device that is included within personal information device 10, the reprogramming code controls processor 20 to query flash memory 26 for a device ID stored therein. Upon ascertaining the device ID of flash memory 26, the reprogramming application proceeds with the erasing of the flash memory. Since the procedures

1 for erasing various types of flash memories are well known in the art, further description thereof is not provided herein. Alternatively, an auto-erase type flash memory may be utilized thus obviating the need for the reprogramming application to carry out a separate erase function.

5 When flash memory 26 is fully erased (alternatively, partially erased), controller 20 programs flash memory 26 by transferring thereto the application code stored in dual-ported memory 22. Once flash memory 26 is programmed with the new application code, the reprogramming feature of personal information device 10 is complete, at which time, processor 20 passes execution to the newly installed flash code. In the presently discussed embodiment, the newly installed flash code generally will represent user organizer features including, for
10 example, telephone/address book, memos, and so on. Of course, the flash code may be diagnostic code that is useful for the development of organizer functions and/or other types of functions.

The above-described reprogramming feature is carried out, as previously discussed, by inserting personal information device 10 within the PCMCIA port of a personal computer, downloading reprogramming data from the computer to dual-ported memory 22 of personal
15 information device 10, removing personal information device 10 from the computer's PCMCIA port, transferring the reprogramming code within the downloaded data to work memory 24, executing the reprogramming code within work memory 24 which, in turn, re-programs flash memory 26 with the downloaded application code stored in the dual-ported memory, and upon
20 completion of reprogramming flash memory 26, passing execution to the application code stored in flash memory 26.

In accordance with another embodiment of the present invention, the above-listed "steps", except the last step of passing execution to the application code, is considered to be a single "pass" wherein a multiple number of "passes" are required to fully reprogram the flash memory.
25 In this embodiment, flash memory 26 may be rather large in size relative to the size of dual-ported memory 22, wherein each "pass" causes a different portion of flash memory 26 to be programmed.

When personal information device 10 is inserted into the PCMCIA port of host personal computer, a partial amount of reprogramming data (also identified as a first set of reprogramming
30 data) is downloaded from the computer to dual-ported memory 22. The downloaded first set of reprogramming data includes "first" reprogramming code and "first" application code. Personal information device 10 then is removed from the PCMCIA port of the host computer, at which time, the "first" reprogramming code is transferred to work memory 24. The "first" reprogramming code stored in work memory 24 is executed which, in turn, causes flash memory
35 26 to be partially reprogrammed (and erased, if necessary) with the "first" application code stored in dual-ported memory 22. The completion of this "first" reprogramming of flash memory 26 is said to complete the first pass.

After the first pass, a second pass is initiated when the user reinserts personal information

1 device 10 into the PCMCIA port of the same host computer, at which point, a second set of
reprogramming data (including a second reprogramming code and a second application code) is
downloaded from the computer to dual-ported memory 22. Personal information device 10 then
is again removed from the PCMCIA port of the host computer, at which time, the second
5 reprogramming code is transferred to work memory 24 and executed which causes flash memory
26 to be again partially reprogrammed (and erased, if necessary) with the second application code
stored in dual-ported memory 22. If necessary, third, fourth and even more passes may be carried
out if necessary. Upon completion of all the necessary passes, execution is passed to the
application code stored in flash memory 26.

10 In the above-discussed "multiple pass" embodiment of the present invention, flash
memory 26 is large in size relative to the other memory components within personal information
device 10. By providing for multiple reprogramming passes, it is possible to reprogram a large
memory (i.e., the flash memory) utilizing a smaller dual-ported memory as well as a smaller work
memory.

15 The Docking Station

In accordance with the present invention, personal information device 10 may connect to
a host computer via a docking station. Fig. 6 is a schematic illustration of a docking station 50
having personal information device 10 coupled thereto. Generally, docking station 50 is utilized
20 when the host computer does not include a PCMCIA port. As shown in Fig. 6, docking station
50 includes a main body 52, a cable 54 and a serial connector 56 attached to the end of cable 54.
Body 52 of the docking station is shaped in such a manner so that personal information device
10 may be slidable therein. Docking station 50 also includes a PCMCIA connector 62 (hidden
in Fig. 6) to which PCMCIA connector 16 of personal information device 10 may be coupled.

25 During its use, docking station 50 receives personal information device 10 in the manner
shown in Fig. 6 and is coupled to the host computer's serial port via serial connector 56. In
another embodiment, docking station includes an appropriate connector, in place of serial
connector 56, that is adapted to couple to the host computer's parallel port or to another I/O port
of the computer. Referring to the block diagram of Fig. 7, docking station 50 includes serial
30 connector 56, PCMCIA connector 62, a buffer memory (RAM) 58 and a processor (CPU) 60.
Alternatively, the buffer memory may be contained within processor 60 itself.

Processor 60 (alternatively, memory 58) includes stored therein docking station executable
code for carrying out the baud rate conversion of the present invention. The executable code,
also identified herein as the baud rate conversion program or code, provides for a fast and
35 effective transfer rate between personal information device 10 and the host computer. In the
preferred embodiment, the baud rate conversation program carries out the fastest serial transfer
rate that is possible between the personal information device and the host computer. Generally,
the personal information device of the present invention is capable of faster serial communication

1 than typical personal computers. For example, the personal information device may have a baud
rate of 67.1875K baud while typical personal computers have a fastest baud rate of 57.6K baud.
However, these numbers generally will go up with further developments and cheaper equipment.
Even so, it is desirable for the personal information device 10 to be able to interface with any
5 type of personal computer and, thus, the baud rate conversion program of the present invention
allows for such interfacing. Without baud rate conversion, the host computer and personal
information device would have to communicate at the highest common baud rate of, for example,
9600 baud.

The docking station in combination with the personal information device and the host
10 computer may operate in a first mode in which baud rate conversion is carried out in docking
station 50, or in a second mode in which baud rate conversion is not carried out and the host
computer and the personal information device are "instructed" to communicate at their highest
common baud rate. The application software being executed by the host computer may
determine in which of these modes the devices are to operate. In such case, to select the "slow"
15 speed mode (i.e., no baud rate conversion), the host computer transmits a zero byte at 19.2K baud
(or less), and to select the "fast" speed mode, the host computer transmits a "FF" at its fast speed
of, for example, 57.6K baud. In the slow speed mode, the serially transmitted data simply passes
through docking station 50 (i.e., processor 60 simply provides the received serial data as an
output). In the fast speed mode, docking station 50 carries out baud rate conversion in the
20 manner discussed below.

When docking station 50 carries out baud rate conversion in accordance with the present
invention, communication between docking station 50 and personal information device 10 of the
present invention is always carried out at the personal information device's fastest
communication speed of, for example, 67.1875K baud (hereinafter 67.2K), and communication
25 between docking station 50 and the host computer is carried out at the computer's fastest
communication speed (or a suitably high speed to facilitate the present invention) of, for
example, 57.6K baud. Thus, and referring to Fig. 8, when data is transmitted from personal
information device 10 to the host computer, data is first sent from personal information device
10 to docking station 50 at the baud rate "A" of 67.2K baud, and then transmitted from docking
30 station 50 to the host computer at the baud rate "C" of 57.6K baud. For transmissions originating
from the computer, data is transmitted from the computer to docking station 50 at the baud rate
"C" of 57.6K baud and then transmitted from docking station 50 to personal information device
10 at the baud rate "B" of 67.2K baud. While the "A" and "B" baud rates are the same,
communication to docking station 50 from personal information device 10 is distinguished from
35 communication to personal information device 10 from docking station 50 because the bit
structure of the transmitted data is different therebetween, as discussed below.

In accordance with the present invention, processor 60 of docking station 50 (in
accordance with the baud rate conversion program) "counts" instruction cycle times of the

1 individual instructions being executed within the baud rate conversion program and, at the proper
times, inputs and/or outputs bits to/from personal information device 10 and the host computer.
That is, each bit of each "framed byte" transmitted/received by docking station 50 follows a
previously transmitted/received bit by a predetermined amount of time since both the transmitting
5 and receiving baud rates are known, and since the amount of time for an instruction cycle within
processor 60 is known, the time at which a bit is transmitted or received is definable in terms of
instruction cycles. In the given example, to maintain the 57.6K baud rate, a bit must be
transmitted or received every 17.36 instruction cycles (for the particular oscillator utilized by
processor 60), and to maintain the 67.1875K baud rate, a bit must be transmitted or received
10 every 14.9 instructions cycles. As discussed herein, a "framed byte" generally includes data bits
(e.g., 8 data bits) and other bits to facilitate serial communication (e.g., start, parity and stop bits).

In accordance with the present invention, Table 1 shown below provides a docking station
input/output (receipt/transmission) schedule of each bit of a respective framed byte that originates
from personal information device 10 and that is supplied to the host computer. Moreover, to
15 facilitate proper baud rate conversion of data supplied to docking station 50 at the 67.1875K baud
rate from personal information device 10 to the slower 57.6K baud rate of data transmitted from
docking station 50 to the host computer, personal information device 10 transmits for each
framed byte an additional two bits (an additional parity bit and an additional stop bit) that are
subsequently not utilized by docking station 50 and thus not transmitted to the host computer.
20 Additional bits are transmitted from personal information device 10 to docking station 50 so as
to effectively slow down the overall byte transfer rate. In the present embodiment, 12 bits are
transmitted at the 67.1875K baud rate by personal information device 10 and include: a start bit,
8 data bits, a parity bit and 2 stop bits. The Docking station, in turn, transmits to the host
computer 10 bits: a start bit, 8 data bits and a stop bit.

TABLE I: Personal Information Device to Computer -- Input/Output Schedule

<u>Instruction Cycle</u>	<u>Receive from PID 10</u>	<u>Transmit to Computer</u>
7	receive start bit	
9		send start bit
22	receive data bit 0 (15)	
26		send data bit 0 (17)
37	receive data bit 1 (15)	
44		send data bit 1 (18)
52	receive data bit 2 (15)	
61		send data bit 2 (17)
67	receive data bit 3 (15)	
78		send data bit 3 (17)
82	receive data bit 4 (15)	
96		send data bit 4 (18)
97	receive data bit 5 (15)	
112		send data bit 5 (16)
113	receive data bit 6 (16)	
127	receive data bit 7 (14)	
131		send data bit 6 (19)
dnc	receive parity bit (dnc)	
148		send data bit 7 (17)
dnc	receive 1 st stop bit (dnc)	
165		send stop bit (17)
dnc	receive 2 nd stop bit (dnc)	

dnc: do not care

Referring to Table 1, a start bit is received from personal information device 10 at instruction cycle 7 which, in turn, causes a start bit to be transmitted to the computer at instruction cycle 9. Processor 60 of the docking station then polls its serial input port at instruction cycle 22 to receive data bit 0, and docking station 50 transmits data bit 0 to the computer at instruction cycle 26. The number of cycles that have passed from the previous input/output is shown in parenthesis in Table 1. As shown, there are between 14 to 16 cycles between the occurrence of two successive inputs from personal information device 10, which reflects the 14.9 instruction cycles per bit at the 67.2K baud rate, and there are between 16 to 19 cycles between the occurrence of two successive outputs to the host computer, which reflects the 17.36 instruction cycles per bit at the 57.6K baud rate. Furthermore, Table 1 does not identify the instruction cycles at which the parity and 2 stop bits are received primarily since the times of reception of these bits are unimportant to the times at which bits are output to the computer. Finally, received data bits are temporally buffered within docking station 50 when necessary so that they may be supplied out at the appropriate instruction cycle.

When data is transmitted from the host computer via docking station 50 to personal

information device 10, the baud rate of the transmitted data is increased from the computer's transmission baud rate of 57.6K baud to the personal information device's reception baud rate of 67.1875K baud. In accordance with the present invention, Table 2 shown below provides a docking station input/output (receipt/transmission) schedule of each bit that originates from the host computer and that is supplied to personal information device 10. In addition, to facilitate a proper decrease in baud rate, docking station 50 adds an additional bit to each framed byte supplied by the host computer. In the present embodiment, the host computer supplies to the docking station 10 bits: a start bit, 8 data bits and a stop bit, which 10 bits have the same structure as the 10 bits supplied to the host computer during personal information device to computer communication, discussed above. The docking station transmits to the personal information device 11 bits: a start bit, 8 data bits, a parity (set) bit and a stop bit. The parity bit in the preferred embodiment is simply a set bit, but may be a reset bit or an actual parity bit.

TABLE II: Computer to Personal Information Device -- Input/Output Schedule

<u>Instruction Cycle</u>	<u>Receive from Computer</u>	<u>Transmit to PID 10</u>
4-11	receive start bit	
26	receive data bit 0	
32		send start bit
43	receive data bit 1 (17)	
47		send data bit 0 (15)
61		send data bit 1 (14)
62	receive data bit 2 (19)	
77		send data bit 2 (16)
78	receive data bit 3 (16)	
92		send data bit 3 (15)
95	receive data bit 4 (17)	
106		send data bit 4 (14)
113	receive data bit 5 (18)	
121		send data bit 5 (15)
130	receive data bit 6 (17)	
136		send data bit 6 (15)
148	receive data bit 7 (18)	
151		send data bit 7 (15)
165	receive stop (17)	
167		send parity (set) (16)

Referring to Table 2, a start bit is received from the host computer sometime between instruction cycle 4 and 11, and then data bit 0 is received at instruction cycle 26. The data bit is buffered and a start bit is transmitted to personal information device 10 at instruction cycle 32. Data bits 1 - 7 and the stop bit are received by docking station 50 at the instruction cycles

1 indicated in the table, and data bits 0 - 7 are transmitted from docking station 50 to personal
information device 10 at the instruction cycles indicated. Finally, a parity (set) bit is supplied to
personal information device 10 at instruction cycle 167, and thereafter a stop bit is transmitted
5 to personal information device 10. In the preferred embodiment, the values of the parity and stop
bits are the same and, thus, the output remains the same to supply the stop bit after the parity (set)
bit.

10 The docking station of the present invention, as discussed above, uses instruction cycles
to determine when bits are to be input or output to a connected device. In an alternative
embodiment of the present invention, a timer is utilized wherein the baud rate conversion
program provides for receiving or outputting a respective bit at a time that is a function of the
15 timer value and the baud rate at which the data is input or output. If the timer is reset after
receiving/outputting each bit, then the timer value itself identifies the passage of time after
reception/transmission of the previously input/output bit. If the timer is not reset, then bits are
received/output at predetermined timer values. One or more timers may be utilized. In one
20 embodiment, a first timer is provided for received bits and a second timer is utilized for output
bits.

As discussed above, the personal information device of the present invention, whether or
not used in combination with the docking station of the present invention, includes therein the
25 capability of re-programming its own flash memory with new/revised application code. The
reprogramming feature of the present invention provides for safe reprogramming by utilizing a
separate work memory that is not accessible to the host computer for reprogramming purposes
and by providing a mechanism for verifying that newly downloaded application code is error free
30 prior to the reprogramming of the flash memory. In addition, the PCMCIA card design of the
personal information device is perfectly suited for mobile use but with advantageously powerful
organizer capability. The personal information device's reprogramming feature further provides
for easier development of application code. Finally, the docking station of the present invention
35 allows the personal information device to interface with a host computer that does not include
therein a PCMCIA port, and further provides the advantageous feature of allowing the host
computer to communicate with the personal information device at its fastest baud rate.

The Wallet

In accordance with the present invention, a flexible wallet, e.g., a leather wallet, may be used in combination with the above-described personal information device, as well as with other similar types of devices. Fig. 9 is an exemplary schematic illustration of wallet 70 having personal information device 10 inserted therein. As shown, wallet 70 includes bottom and top halves 72, 74 (or left, right halves, etc.) that may be opened/closed (represented by arrows "A") in a "wallet" like manner. Bottom half 72 includes a touchpad 80 and optionally may include a serial connector 82 to which a cable 90 may be coupled (to be discussed). Top half 74 may include a device holder 76 that operates to hold a personal information device when inserted therein in the direction shown by arrow "B". Alternatively, the device holder may be a strap or other suitable device that holds the personal information device in place.

Referring to Fig. 10, which illustrates wallet 70 without the personal information device coupled thereto, top half 74 of wallet 70 includes contact pins 84 which operate to make contact with appropriate opposing surfaces on the back of personal information device 10 for electrical connection thereto. Contact pins 84 are electrically connected to touchpad 80 and operate as the input/output terminal of touchpad 80. In one embodiment of the present invention, and as will be discussed, personal information device 10 via contact pins 84 provides a source of power to touchpad 80. Contact pins 84 also function as an output to personal information device 10 by supplying a signal thereto that represents the user input on touchpad 80.

Wallet 70 further includes hooks 86 that assist in holding device 10 once inserted, guiders 88 that operate to guide device 10 into wallet 70 for proper insertion therein, and a snap 89 that maintains wallet 70 in its closed position (with bottom and top halves 72, 74 touching).

When personal information device 10 is inserted within wallet 70, such as shown in both Figs. 9 and 11, both the display and the input buttons of device 10 are readable\accessible to the user, and wallet 70 operates to allow a user to input data and other information into device 10 in a number of ways. In operation, personal information device 10 detects when it is coupled to wallet 70 in any appropriate fashion, for example, by polling its electrical surfaces (that are intended to make contact with contact pins 84) for input thereto, by means of an interrupt, or other method that is known in the art. When connection to wallet 70 is detected, personal

1 information device 10 generally provides to the user all of the functions and features that are
provided when not connected to wallet 70, but further provides various additional features
including, for example, those features that are provided to the user via the host computer, as
5 previously discussed. Such features include telephone/address book entries, note entries,
appointment entries, and so on.

In a preferred embodiment of the present invention, contact pins 84 as well as opposing
electrical surfaces on the personal information device are not utilized and, instead,
10 communication between wallet 70 and personal information device 10 is carried out by the use
of electro-magnetic induction. Communication via electro-magnetic induction is contactless and,
thus, external components are unnecessary for wallet 70 to provide data to personal information
device 10 and for personal information device 10 to provide data to wallet 70. In this preferred
15 embodiment, one coil (not shown) is provided within the personal information device and one
coil (also not shown) is provided, for example, on a rigid board such as a small PC board within
the top half 74 of the wallet. The PC board within the top half of the wallet may include the
necessary circuitry to couple the wallet's coil to touchpad 80.
20

As is appreciated, communication between wallet 70 and personal information device 10
via electro-magnetic induction provides various advantages over hard-wired or electrically
coupled communication (e.g., via pins 84). Pins are susceptible to wear and breakage, and
25 communication between the devices is prone to errors when the metal surfaces are not clean.
Moreover, exposed electrical contacts often present an electro-static discharge (ESD) problem
and generally require that there be a tight physical and aligned connection between the devices
to ensure proper contact.

30 When wallet 70 and personal information device 10 are designed to communicate via
electro-magnetic induction, and not by direct electrical contact, wallet 70 requires its own power
source (e.g., battery). In accordance with the present invention, the input device (i.e., touchpad
80) of wallet 70) remains "off" (i.e., essentially unpowered), so as to maximize battery life,
35 unless an attached personal information device is on. Wallet 70 is "on" (i.e., the input device of
the wallet is powered) when the attached personal information device is on. To "wake up" wallet
70, personal information device 10 sends a so-called "wake" signal which is, for example, a burst

1 on a 10KHz carrier signal, via the induction coils to the wallet. When the circuitry within wallet
70 detects the 10KHz signal, touchpad 80 is automatically turned on. In a preferred
embodiment, the personal information device is designed to send a so-called "stay awake" signal
5 periodically (e.g., every 5 seconds, every 30 seconds, every 60 seconds, etc.) and wallet 70 is
designed to remain awake if the stay awake signal is received periodically. If wallet 70 doesn't
receive the stay awake signal within a predetermined time period, the input device (i.e., the
touchpad) of wallet 70 is de-powered. In this instance, battery life of the wallet is preserved if
10 the personal information device is turned off or if the personal information device is removed
from wallet 70. Once turned on, wallet 70 transfers data serially to personal information device
10 using, for example, bursts on an 80 KHz carrier. The received signal is converted within
personal information device 10 to the appropriate data.

15 Figs. 12A and 12B schematically illustrate exemplary circuits that can be utilized within
wallet 70 and personal information device 10, respectively. The touchpad 80 hardware may be
coupled to a small microcomputer to drive the wallet's coil, and in order to wake the wallet (i.e.,
touchpad 80), a bandpass filter (alternatively, a microcontroller) filters out all but the 10KHz
20 signal used by the personal information device to signal that it is on. Within personal
information device 10, circuitry to drive device 10's induction coil to signal that device 10 is on
may be built into the ASIC of the personal information device. Also circuitry is built into the
25 ASIC to convert the 80 KHz signal into serial data. A bandpass filter is utilized to filter out all
but the 80 KHz signal. Since the particular operations of the circuits shown in Figs. 12A and 12B
are known to one of ordinary skill in the art, a detailed description of the operation of these
exemplary circuits is omitted herein. Of course, other known, appropriate circuits may be
30 utilized.

In accordance with an embodiment of wallet 70 of the present invention, touchpad 80 is
silk-screened with a complete keyboard, such as shown in Figs. 10 and 11, and thus all entries
35 that can be made via a computer keyboard can be made via the keyboard on touchpad 80.
Touchpad 80 may be a pressure-sensitive type display. However, in the preferred embodiment
of the present invention, touchpad 80 is a Cirque GlidePoint® touchpad which is based on
electrical capacitance and which does not require pressure or direct contact. Such touchpad

1 contains a two-layer grid of electrodes which are connected to an integrated circuit mounted on
the reverse side of the touchpad, the first (upper) layer containing vertical electrode strips and the
second (lower) layer containing horizontal electrical strips. Mutual capacitance from each of the
5 horizontal electrodes to each of the vertical electrodes, and which is modified by the presence of
a human finger, is measured by the touchpad's integrated circuit. Fig. 13 schematically illustrates
the operation of the touchpad. Upon detection of the human finger, touchpad 80 supplies as an
output (via contacts 84 or electro-magnetic induction) the coordinates of the finger position and
10 the personal information device identifies the selected key as a function of the supplied
coordinates. Alternatively, touchpad 80 supplies as an output a signal representing a data value
that identifies the selected key (e.g., 1 = "A", 2 = "B", etc.).

15 In the presently discussed embodiment, wallet 70 advantageously allows a user to enter
all necessary information into personal information device 10 without the need for a host
computer. As shown in Figs. 9-11, wallet 70 is compact and conforms to the shape of personal
information device 10 thus allowing one to easily utilize wallet 70 in combination with personal
20 information device 10 at all times.

In accordance with another embodiment of the present invention, touchpad 80 is replaced
with a touch-sensitive (pressure sensitive or alternatively, non-pressure sensitive) display that is
operable to display an image (display) thereon in accordance with a signal(s) (i.e., data) supplied
25 from personal information device 10 thereto via contact pins 84 or electro-magnetic induction.
In this embodiment, the display on the touch-sensitive display varies in accordance with the user-
selected function to facilitate ease of use of that particular function. For example, upon user
selection of the appointment schedule feature, personal information device 10 supplies to wallet
30 70 an appropriate signal (i.e., data) so that a calendar is displayed by the touch-sensitive display
of wallet 70 and the user simply selects (i.e., touches) that day/date at which an appointment is
to be scheduled. Upon selection of the desired day/date, the display of wallet 70 may then be
controlled by personal information device 10 to display different times of the day (e.g., 9 a.m.,
35 10 a.m., etc.) for selection by the user. Flat panel display 12 of personal information device 10
may, during each step mentioned above, provide instructions to the user as well as any other
information to facilitate ease of use of the device. Wallet 70 may include a buffer memory for

1 storing therein the display data supplied from personal information device 10. Alternatively, the
memory within wallet 70 may be a non-volatile memory having pre-stored therein data pertaining
to plural displays and thus the display data mentioned above that is supplied from personal
5 information device 10 may simply identify which of the pre-stored displays wallet 70 is to
provide to the user.

In accordance with a further embodiment of wallet 70 of the present invention, touchpad
80 provides for user input via drawing with a finger or stylus (i.e., "inking"). The drawn input,
10 representing, for example, a memo or note, may be stored as a graphic within personal
information device 10. Alternatively, personal information device 10 includes appropriate
recognition software that converts the drawn information into text data that is then stored in
memory.

15 In accordance with yet another embodiment of wallet 70 of the present invention, top half
74 of wallet 70 includes a PCMCIA connector, for example, within holder 76 shown in Fig. 9,
to which the PCMCIA connector of personal information device 10 may be directly coupled. In
this embodiment, wallet 70 generally will not require contact pins 84 or electro-magnetic
20 induction technology. The various power and data signals are supplied via the respective
PCMCIA connectors of wallet 70 and personal information device 10. The operation of wallet
70 having a PCMCIA connector may be similar to those embodiments previously discussed.

25 Referring back to Fig. 9, and as previously mentioned, wallet 70 may include a serial
connector 82 to which a cable 90 may be coupled for the purpose of interfacing personal
information device 10, when inserted into wallet 70, to a host computer. Cable 90 may include
attached thereto a serial connector or other type of connector, (not shown) that may be connected
30 to the serial or other port of the host computer. Cable 90 may even be attached to a PCMCIA
card that can be inserted into the PCMCIA port of the host computer. Still further, cable 90 may
be attached to a device that functions in a manner similar to that of docking station 50, previously
discussed, to carry out baud rate conversion. When wallet 70 has inserted therein personal
35 information device 10 and is also coupled to a host computer, for example, via cable 90, any and
all of the previously discussed features may be performed, including the downloading of
reprogramming data from the host computer to personal information device 10 and/or the

1 downloading of user-entered data (e.g., appointment information, address/telephone information,
etc.). In addition, the added capability of uploading data from personal information device 10
may be provided since personal information device may include information therein that is
5 entered thereto via wallet 70 and that is not reflected in the host computer.

In accordance with another embodiment of the present invention, serial connector 82 of
wallet 70 may be coupled via cable 90 (or other suitable cable) to any one of a number of
peripheral devices including, for example, a modem, a facsimile machine, another personal
10 information device, embodying the present invention and so on. The application code within
personal information device 10 inserted within wallet 70 provides the appropriate signals to the
attached peripheral device.

15 While the present invention has been particularly shown and described in conjunction with
preferred embodiments thereof, it will be readily appreciated by those of ordinary skill in the art
that various changes may be made without departing from the spirit and scope of the invention.
For example, although the present discussion is directed to a wallet into which the above-
described personal information device may be inserted, the disclosed wallet may be designed to
20 accept devices of other shapes and sizes, as well as devices that carry out different functions than
those mentioned herein.

As another example, although the wallet of the present invention has been described as
25 having a particular shape and size, e.g., a two-fold wallet, the wallet may be of a different shape
and size (e.g., a three-fold type wallet, a wallet with folds along perpendicular axes, etc.).

Therefore, it is intended that the appended claims be interpreted as including the
embodiments described herein, the alternatives mentioned above, and all equivalents thereto.
30

35

1 CLAIMS:

1 1. A wallet for use with a personal information device, said wallet comprising:
a first portion including an input device for receiving a user-supplied entry; and
5 a second portion rotatably coupled to said first portion, said second portion being adapted to receive and detachably retain a personal information device in the form of a PCMCIA card, said second portion including supply means electrically coupled to said input device and being adapted to communicate with said personal information device.

10 2. The wallet of claim 1, wherein said input device is a touch pad in the form of a keyboard.

15 3. The wallet of claim 1, wherein said supply means are electrical contacts adapted to contact opposing surfaces on said personal information device when retained by said wallet.

20 4. The wallet of claim 1, wherein said supply means is an induction coil adapted to communicate without electrical contact with said personal information device when retained by said wallet.

25 5. The wallet of claim 1, wherein said input device is a touch-sensitive display device operable to display information to the user, and said supply means is operable to receive from said personal information device control data, and said touch-sensitive display device provides a display to said user in accordance with said control data.

30 6. The wallet of claim 1, wherein one of said first and second portions includes a memory having pre-stored therein a plurality of sets of display data, each of said sets of display data representing a respective display displayable on said touch-sensitive display device; said control data supplied by said personal information device identifies one of said pre-stored sets of display data and said touch-sensitive display device provides to said user a display corresponding to said one of said pre-stored sets of display data identified by said control data.

1 7. The wallet of claim 1, wherein said supply means is a PCMCIA port adapted to be
coupled to a PCMCIA I/O port of said personal information device when said wallet receives said
personal information device.

5 8. The wallet of claim 1, wherein said first and second portions represent first and second
halves, respectively, and are adapted to be held in an open position in which a display of said
personal information device and said input device of said wallet are both accessible to the user,
10 and are adapted to be folded together wherein respective faces of said first and second halves face
each other defining a closed position; and wherein neither said display of said personal
information device nor said input device of said wallet is accessible to said user in said closed
15 position.

 9. The wallet of claim 1, wherein one of said first and second portions further includes
an I/O connector adapted to be coupled via a cable to an external device, said I/O connector being
20 electrically connected to said supply means and being adapted to provide data supplied from said
external device to said supply means, and said supply means is adapted to supply said data
supplied thereto including data supplied from the external device to said personal information
device.

25 10. The wallet of claim 9, wherein said external device is a computer.

30 11. The wallet of claim 9, wherein said external device is another wallet including
mounted therein another personal information device so that communication between two
coupled personal information devices is possible.

35 12. A wallet in combination with a personal information device, the combination
comprising:

 a wallet first portion including an input device for receiving a user-supplied entry;

 a wallet second portion rotatably coupled to said first portion, said wallet second portion

1 being adapted to receive and detachably retain a PCMCIA card;

a personal information device in the form of a PCMCIA card, said personal information device detachably retained in said wallet second portion, said personal information device
5 including:

a display for displaying information to the user;

an input device for receiving a user-supplied input, and

10 input means for receiving data from said wallet when said personal information device is retained therein,

and said wallet second portion includes output means for providing said user-supplied entry as an output of said wallet to said input means of said personal information device.

15 13. The combination of claim 12, wherein said output means of said wallet second portion and said input means of said personal information device are opposing electrical contacts adapted to contact with each other when said personal information device is retained in said wallet.

20 14. The combination of claim 12, wherein said output means of said wallet second portion and said input means of said personal information device are induction coils adapted to provide communication between said wallet and said personal information device without electrical
25 contact therebetween.

30 15. The combination of claim 12, wherein said input device in said wallet first portion is a touch pad in the form of a keyboard.

35 16. The combination of claim 12, wherein one of said wallet first portion and wallet second portion further includes an I/O connector adapted to be coupled via a cable to an external device, said I/O connector being electrically connected to said output means of said wallet said portion and being adapted to provide data supplied from said external device to said output means, and said output means is adapted to supply said data supplied thereto including data supplied from the external device to said personal information device.

1 17. A wallet in combination with a personal information device, the combination comprising:

 a personal information device having a display, an input device and an induction coil; and

5 a wallet having an input device and an induction coil, said wallet being adapted to receive and detachably retain said personal information device, and

 said induction coil of said personal information device and said induction coil of said wallet are adapted to communicate with each other without electrical contact therebetween when
10 said personal information device is retained by said wallet.

 18. The combination of claim 17, wherein said personal information device is a PCMCIA card adapted to connect to a PCMCIA port of a device.
15

 19. The combination of claim 17, wherein said input device of said wallet is operable to be turned on and off; said personal information device includes means for supplying a wake signal to said wallet when said personal information device is retained by said wallet; and said
20 wallet further includes control means for operatively controlling said input device of said wallet to turn on in response to receipt of said wake signal by said wallet.

 20. The combination of claim 17, wherein said input device of said wallet is operable to be turned on; said personal information device includes means for controlling said induction coil of said personal information device to supply a wake signal to said wallet; and said input device of said wallet is adapted to be automatically turned on when said induction coil of said wallet
30 receives said wake signal.

 21. The combination of claim 20, wherein said means for controlling controls said induction coil of said personal information device to supply a stay-awake signal periodically.
35

 22. The combination of claim 21, wherein said input device of said wallet is adapted to turn off if a stay-awake signal is not received by said wallet within a predetermined period of

1 time after receiving a previously received stay-awake signal.

23. The combination of claim 17, wherein said wallet includes a limited power source for
5 supplying power to said wallet; and said input device of said wallet is adapted to utilize power
supplied from said limited power source when a wake signal is received by said induction coil
of said wallet; and said personal information device includes means for controlling said induction
coil of said personal information device to supply said wake signal when said personal
10 information device is turned on and is retained by said wallet.

24. The combination of claim 17, wherein said wallet includes a wallet first portion
15 having said input device for receiving a user-supplied entry and a wallet second portion rotatably
coupled to said wallet first portion, said wallet second portion being adapted to receive and
detachably retain said personal information device.

25. A method of communication between a personal information device and a wallet
20 having an input device therein, said wallet adapted to receive and detachably retain said personal
information device, said method comprising the steps of:

mechanically coupling said personal information device to said wallet;

25 supplying from said personal information device to said wallet a wake signal after said
personal information device and said wallet are coupled;

receiving by said wallet said wake signal supplied by said personal information device;

and

30 turning on said input device of said wallet automatically in response to said wallet
receiving said wake signal.

26. The method of claim 25, wherein said step of supplying is carried out by supplying
35 said wake signal via an induction coil of said personal information device; and said step of
receiving is carried out by an induction coil of said wallet.

1 27. The method of claim 26, further comprising the step of supplying from said personal
information device to said wallet a stay-awake signal periodically.

5 28. The method of claim 26, further comprising the step of turning off said input device
of said wallet if said wallet does not receive a stay-awake signal within a predetermined period
of time after receiving a previously received stay-awake signal.

10

15

20

25

30

35

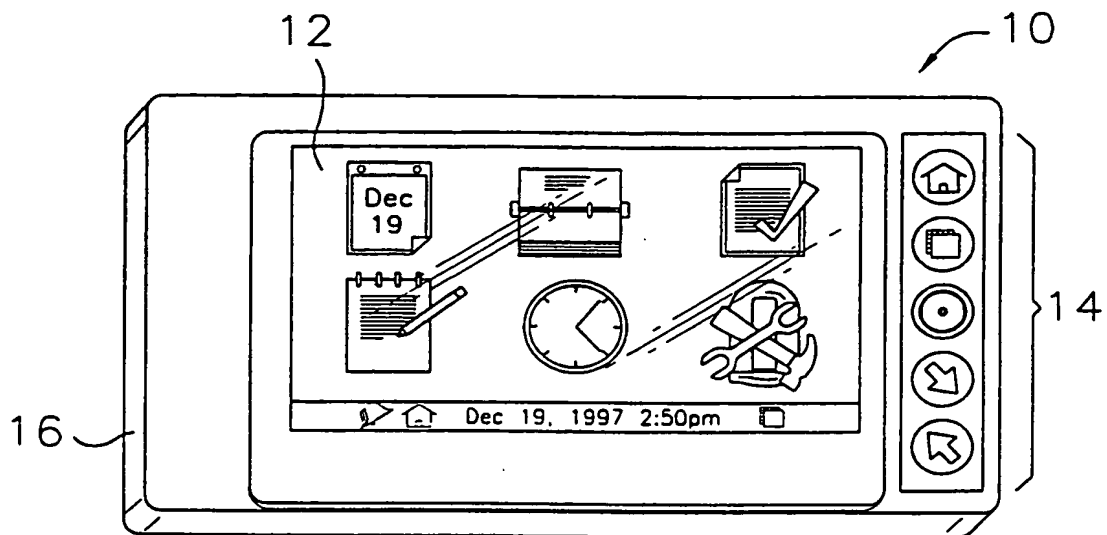


FIG. 1

CALENDAR

WEDNESDAY	
9:30	TURNER PRESENTATION
10:30	CONFERENCE CALL ON FORECAS...
12:00	MEET WITH SUSAN AND BILL
1 Dec, 1997 7:220	

FIG.2A

CARDFILES

ACME PRINTING	215-555-7700
B&B MARKETING	412-555-3232
DESIGN CONCEPTS	609-555-1313
ERS REALTY	704-555-2500
EXECUTIVE RECRUITING	212-555-6565
MERCURY SOFTWARE	609-555-6962
SMC PARTNERS	213-555-4400
1 Dec, 1997 7:210	

FIG.2B

TO-DO LIST

<input type="checkbox"/> OVERNIGHT PROPOSAL TO PATI	
<input type="checkbox"/> BETA UNITS FOR RICH	
<input type="checkbox"/> SEND MEMO TO PATTI	
<input type="checkbox"/> GET ARTICLE FROM LARRY	
<input type="checkbox"/> REVIEW EMAIL FROM BARRY	
<input type="checkbox"/> CALL CAROLYN	
<input type="checkbox"/> CALL LEN	
1 Dec, 1997 7:240	

FIG.2C

MEMOS

TURNER PRESENTATION	
TALK POINTS:	
1. OBJECTIVE	
2. STRATEGY	
3. PROGRAM IMPLEMENTATION	
4. TIMING	
5. STAFFING	
1 Dec, 1997 7:250	

FIG.2D

CLOCK WITH ALARM



<input checked="" type="radio"/> HOME CLOCK	<input type="radio"/> WORLD CLOCK
	
1 Dec, 1997	2 Dec, 1997
NEW YORK, NY	PARIS
1 Dec, 1997 7:250	


FIG.2E

TOOL KIT

PREFERENCES	
DATE DISPLAY	12 HOUR
ALARM SOUND	1 DEC, 1997
KEY CLICKS	SHORT
AUTO SHUT-OFF	ON
PASSWORD LOCK	1-MINUTE
PASSWORD	DISABLED

1 Dec, 1997 7:260	

FIG.2F

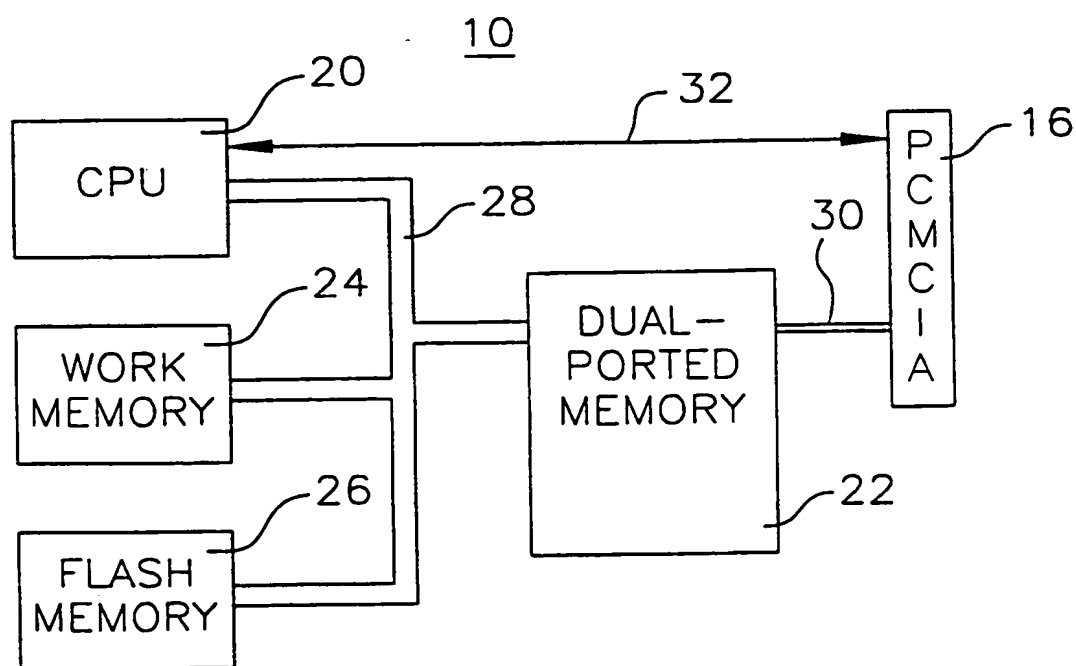**FIG. 3**

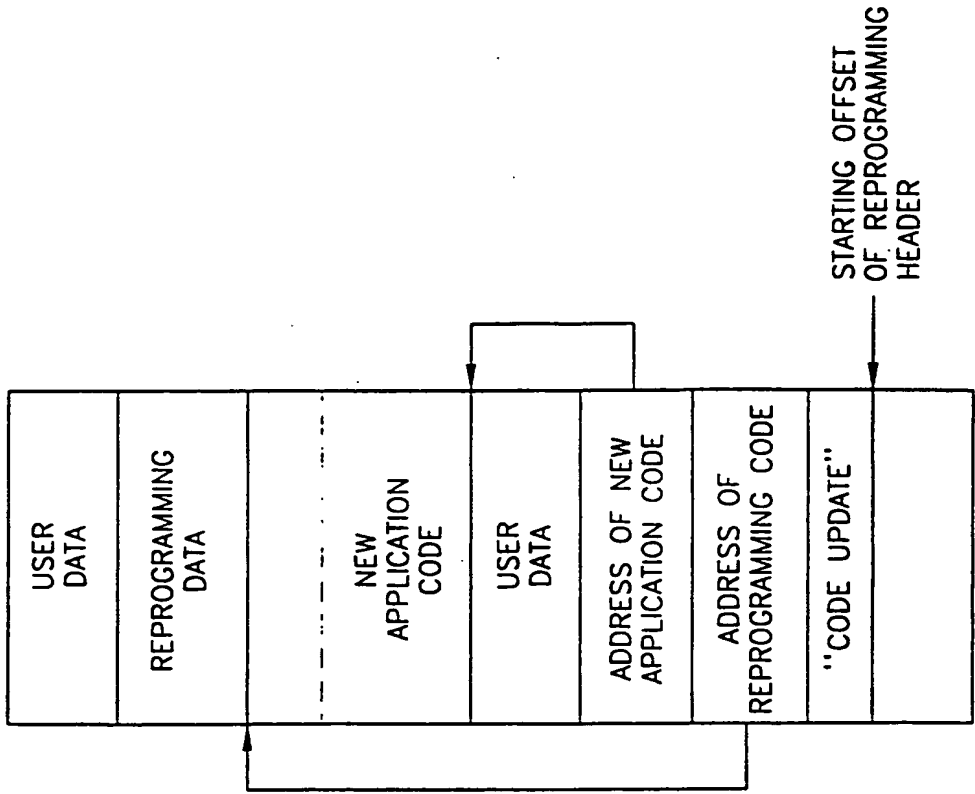


FIG.5




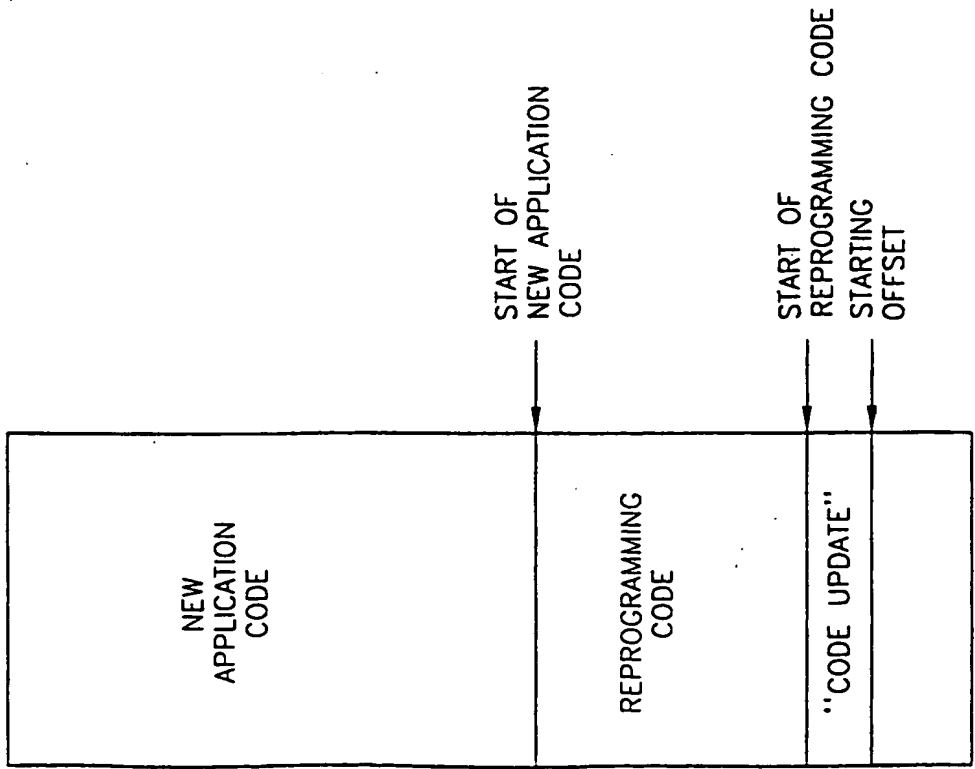



FIG.4

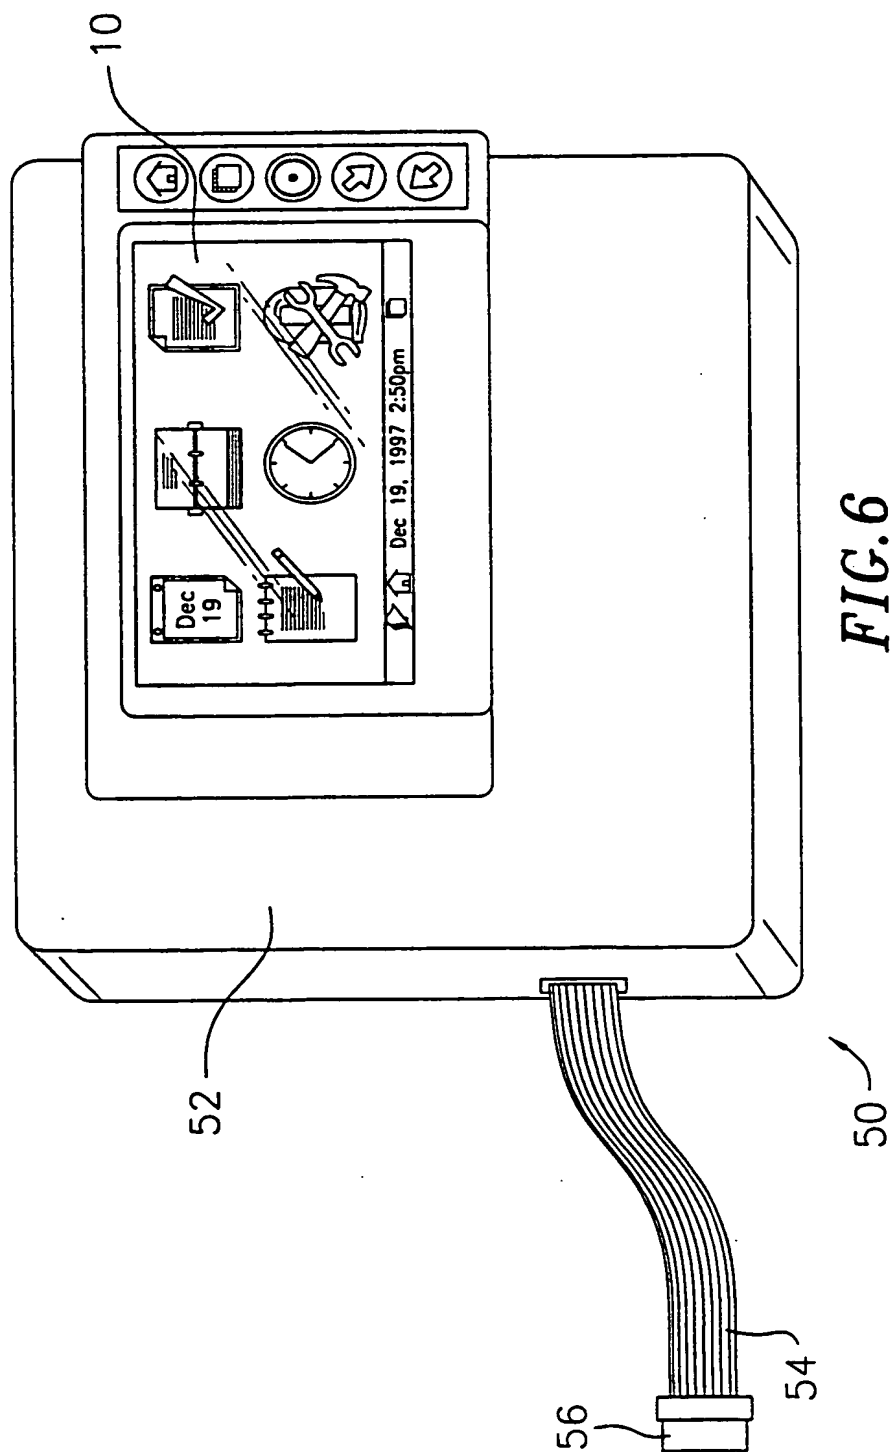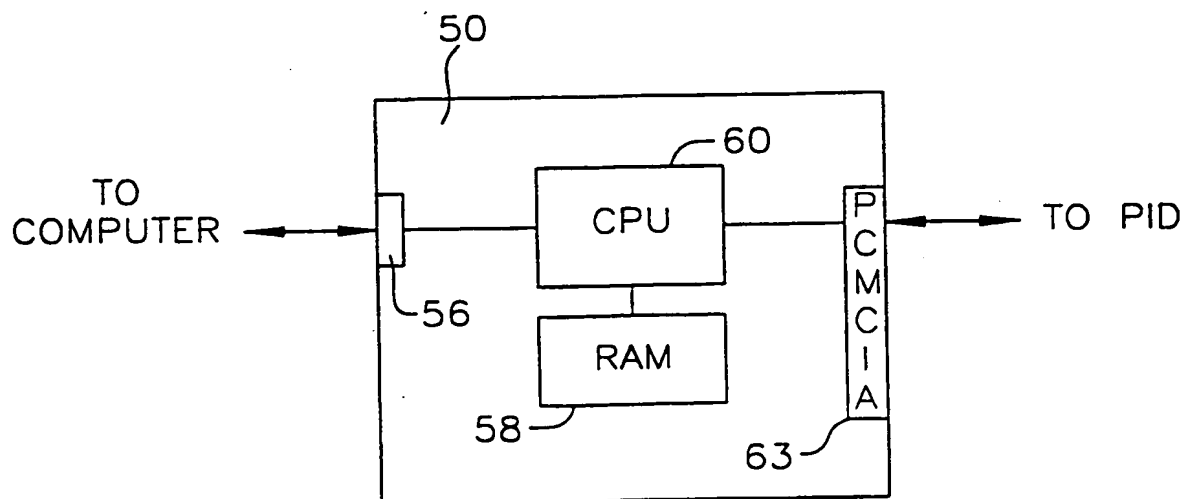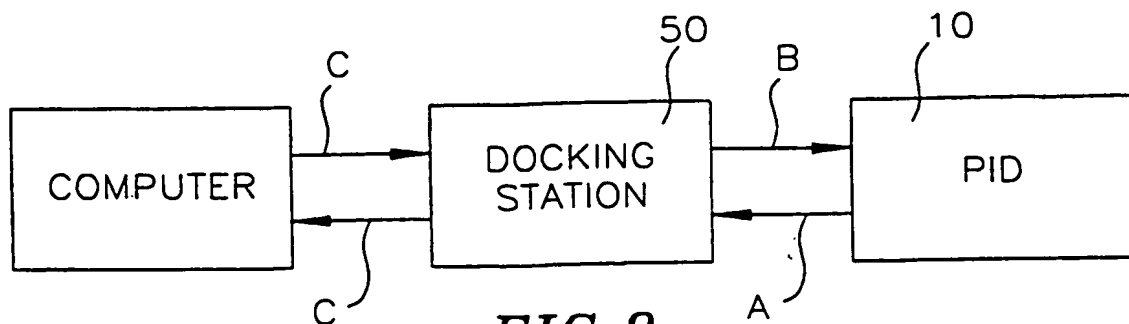

6/10

**FIG. 7****FIG. 8**

7/10

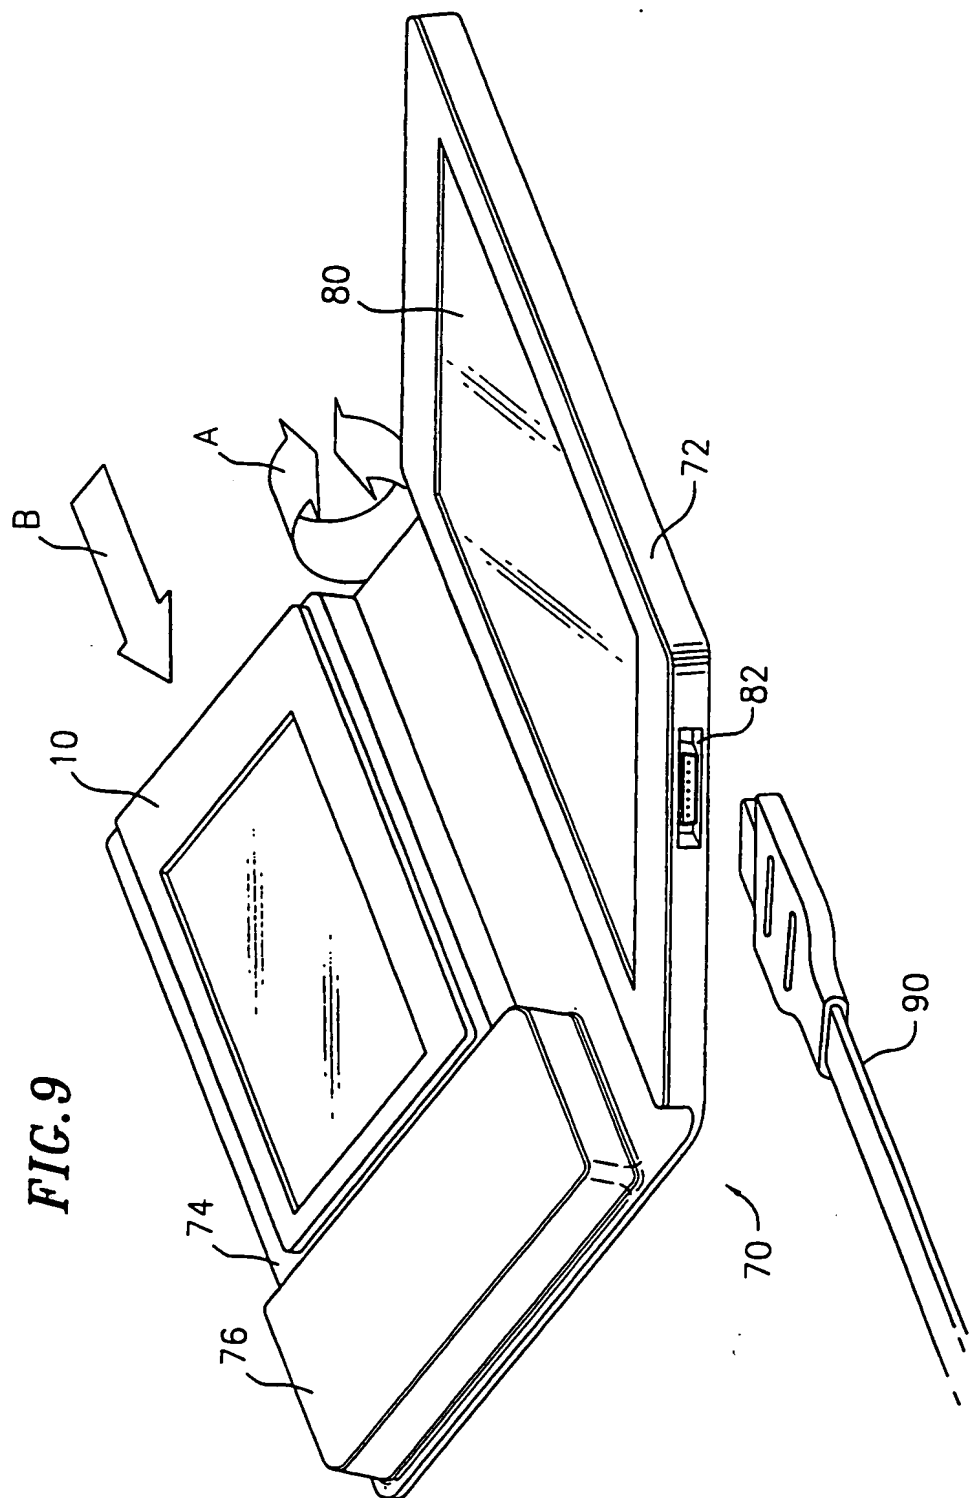

9/10

FIG. 12A


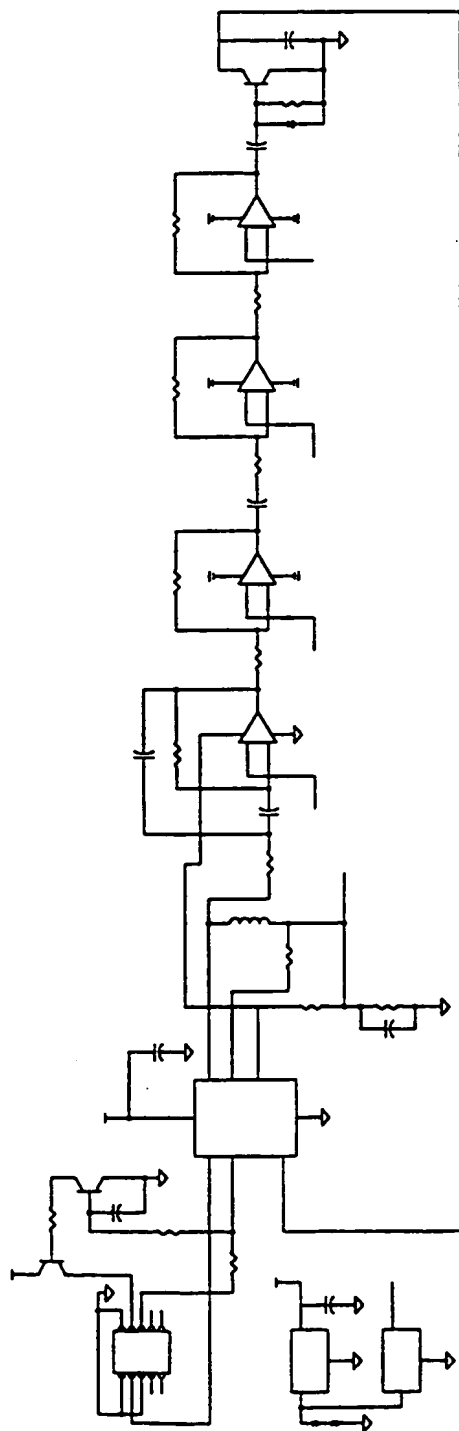


FIG. 12B

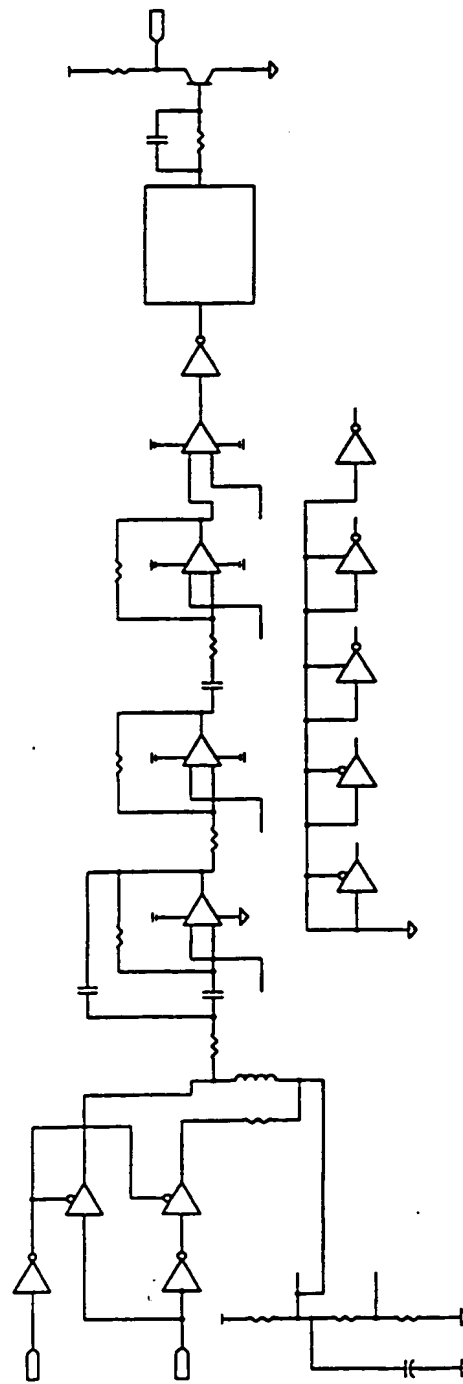

10/10

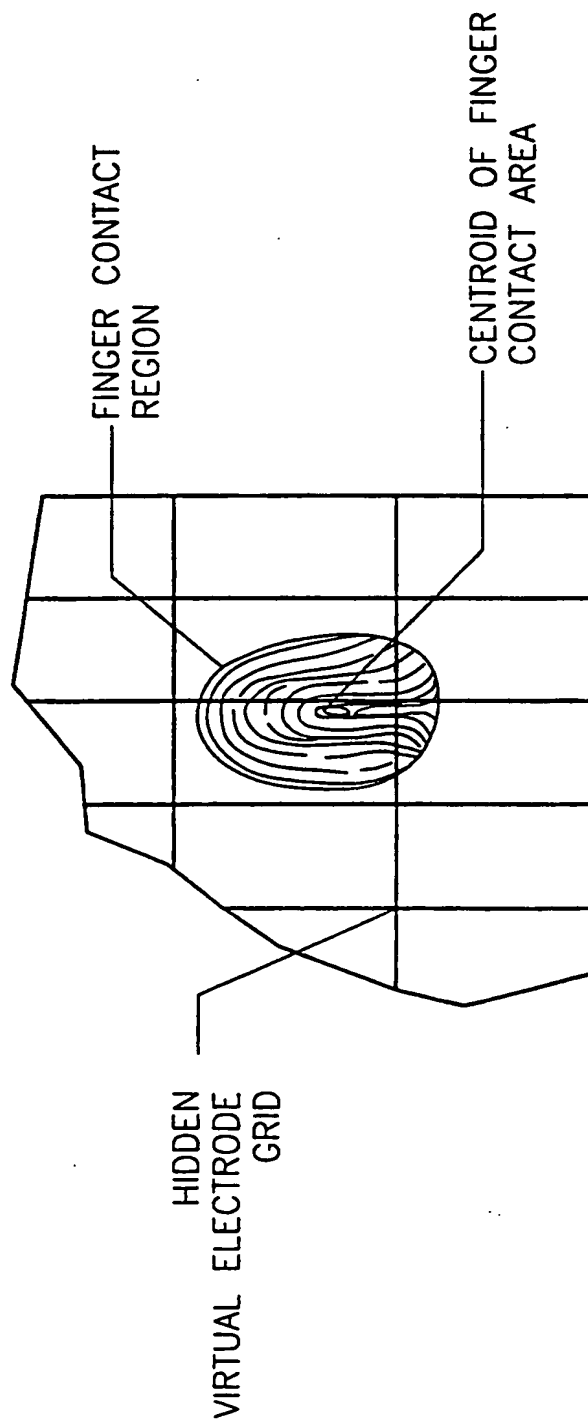


FIG. 13

INTERNATIONAL SEARCH REPORT

Int. national application No.
PCT/US99/26626

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : G06P 13/10

US CL : 710/62, 63, 72, 73, 74, 102, 129

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 710/62, 63, 72, 73, 74, 102, 129

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WEST

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,039,846 A (KOMAKI) 13 August 1991, col. 1, lines 6-11, col. 1, lines 61-68, col. 2, lines 1-5	1-28
Y,P	US 5,848,298 A (STEERE, Jr. et al) 08 December 1998, col. 1, lines 22-28, col. 4, lines 15-19, col. 4, lines 54-64, col. 7, lines 33-35, col. 8, lines 2-5	1-28
Y	US 5,619,396 A (GEE et al) 08 April 1997, col. 2, lines 64-67, col. 3, lines 15-18, col. 3, lines 31-35	1-28
Y	US 5,594,680 A (OHDAKE et al) 14 January 1997, abstract	4,14, 17- 24, 26-28

☒ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Z* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

15 MARCH 2000

Date of mailing of the international search report

07 APR 2000

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

THOMAS C. LEE

Telephone No. (703) 305-9717

INTERNATIONAL SEARCH REPORT

I national application No.
PCT/US99/26626

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,245,346 A (NISHIMURA et al) 14 September 1993, col. 8, lines 38-48, col. 9, lines 18-27	19-23, 25-28